

## Model 9000 Precision Pressure Transducer

- Transducer is customized to your specific temperature and pressure conditions
- Outputs: 4-20mA, 0-5 Vdc, 0-10 Vdc. Optional 4-wire, isolated outputs and RS232/RS485 available.
- Pressure ranges 0-10" WC to 30,000 PSI
- Standard accuracy of 0.05% BFSL (optional 0.03%)
- Built-in, proprietary design, lightning and surge protection supplied as standard
- Unparalleled long-term stability
- Digital temperature correction at operating conditions
- Field rangeable 5:1

CE



Spectre's Series 9000 is the first available pressure transducer that is designed, manufactured and calibrated to each application's specific operating conditions. **Each transducer's output is digitally mapped to correct for any non-linearity or inaccuracies in the sensing element.** This digital correction provides the most accurate and flexible pressure transducer in the industry.

### Performance @ 25°C (77°F)

Accuracy:  $<\pm 0.05\%$  Best Fit Straight Line (BFSL)  
Stability (2 year):  $<\pm 0.05\%$  FS, typical  
Over pressure protection: 2X Rated Pressure  
Burst Pressure: 5X minimum  
Pressure Cycles:  $>50$  Million  
Temperature range:  $-55$  to  $+70^{\circ}\text{C}$  ( $-65$  to  $+158^{\circ}\text{F}$ )  
Optional to  $+100^{\circ}\text{C}$  ( $+212^{\circ}\text{F}$ )  
Temperature Accuracy:  $\pm 1^{\circ}\text{C}$  ( $\pm 1^{\circ}\text{F}$ )  
Total Error Band:  $\pm 0.2\%$  (includes zero, span, static accuracy and temperature)

### Environmental Data

Storage temp:  $-50$  to  $+125^{\circ}\text{C}$  ( $-60$  to  $+250^{\circ}\text{F}$ )  
Compensated range:  $-40$  to  $50^{\circ}\text{C}$  ( $-40$  to  $+125^{\circ}\text{F}$ )  
Optional:  $-55$  to  $+100^{\circ}\text{C}$

Temp comp Zero:  $<\pm 1.5\%$  FS  
Temp comp Span:  $<\pm 1.5\%$  FS

### Electrical Data

#### Excitation:

6.0-36 Vdc - 4-20mA output  
9-36 Vdc - 0-5 Vdc output  
14-36Vdc - 0-10 Vdc output  
Option C29: Max 29 Vdc excitation

Optional serial comms: RS232 or RS485  
Current consumption:  $<15\text{mA}$   
Output load:  $>10\text{K Ohm}$

### Physical data

Sensor wetted material: 17-4 PH SS – 316SS,  
(others on application)  
Body material: 304 or 316SS  
Pressure connection:  $\frac{1}{4}$ " Male NPT, SAE-4 male  
(others on application)

Electrical Connection: 36' wiring leads, DIN, Bendix  
Canon (others on application)

## Model 9000 Precision Pressure Transducer

Ordering guide – Example: 9000-A-(0-150PSIG)-2-D-05-EC2

A	(0-150PSIG)	2	D	05	EC2
Pressure Port	Range	Units	Output	Accuracy	Connector***
A=1/4" MNPT B=SAE-4 C=Other D=1/8" MNPT E=Autoclave F-250-C	Specify pressure range in: PSI, BAR, kPa or inches WC.	1=Absolute 2=Gauge 3=Vacuum 4=Sealed 5=Compound 6=Other	D=4-20mA E=0-5VDC F=0-10VDC G=RS232** H=RS485** X=Other (4-wire, isolated versions available-contact factory)	05=0.05% BFSL* 03=0.03% BFSL*	EC1=36" pigtail EC2=DIN 43650 with mate – Large EC3=Mini DIN with mate EC4=Bendix 6-pin EC9=1/2" NPT with 36" leads ECX=Other


\*BFSL = Best Fit Straight Line

\*\*Combination 4-20mA + Comms available – consult factory

\*\*\* Some outputs may preclude use of certain connectors – consult factory for details

Note: Operating temperature must be specified at time of order placement.

### Dimensions:

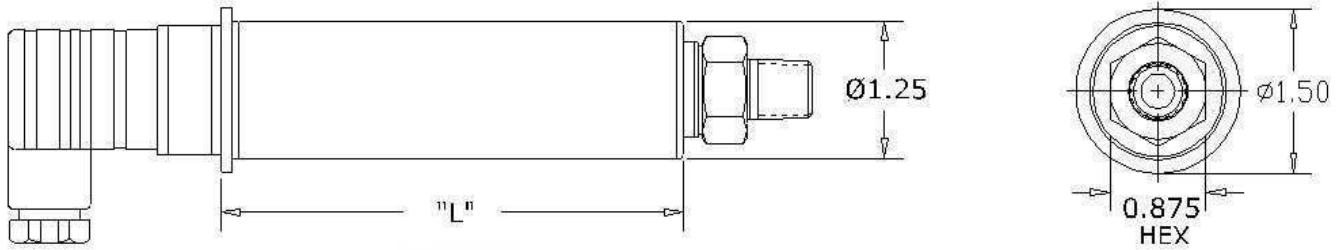

"L" = 4.3" in ranges >300 psi, 5.2" in ranges <300 psi.  
Dimensions may vary with options

### Current Output

Wiring	4-20mA, DIN 43650
Pin 1	+ excitation
Pin 2	- excitation/signal
Pin 3	no connection
Pin 4	no connection
Power	6-36 Vdc

Wiring	4-20mA, Cable
White	+ excitation
Black	- excitation/signal
Power	6-36 Vdc

### Voltage Output

Wiring	Voltage, DIN 43650
Pin 1	+ excitation
Pin 2	+ signal
Pin 3	- excitation/signal
Pin 4	no connection
Output	Power
0-5 Vdc	9-32 Vdc
0-10 Vdc	13-32 Vdc

Wiring	Voltage, Cable
Red	+ excitation
Green	+ signal
Black	- excitation/signal
White	no connection
Output	Power
0-5 Vdc	9-32 Vdc
0-10 Vdc	13-32 Vdc